

The background features a dark grey color with a white line-art outline of an acoustic guitar. The Ibanez logo is prominently displayed in the upper center in a white, cursive script. Below the logo, the text 'IBANEZ ACOUSTIC GUITAR' is written in a clean, white, sans-serif font. The guitar outline shows the body, neck, and headstock, with the bridge and pickup area visible at the bottom.

# Ibanez

IBANEZ ACOUSTIC GUITAR

---



## Preamp Information

Ibanez Custom Electronics w/  
Undersaddle Pickup Volume and Contact Pickup Volume

---

[WWW.IBANEZACOUSTIC.COM](http://WWW.IBANEZACOUSTIC.COM)


# Ibanez Custom Electronics w/Undersaddle Pickup Volume and Contact Pickup Volume

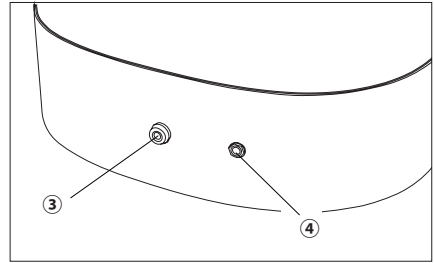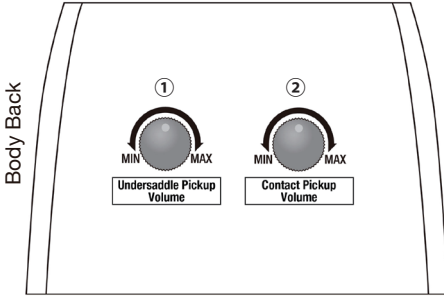

ENGLISH

## Basic Controls

- ① **Undersaddle Pickup VOLUME**  
Adjusts the volume of the Undersaddle Pickup.
- ② **Contact Pickup VOLUME**  
Adjusts the volume of the Contact Pickup.
- ③ **Endpin Output Jack**
- ④ **1/4" Output Jack**

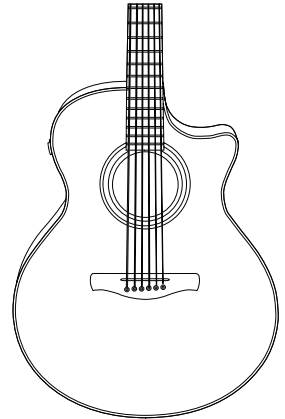

MIX : Undersaddle Pickup + Contact Pickup **Fig.1**


### ■ Monaural Output (Fig.1)

When only plugged in to the Endpin Output Jack ③, the signals of the Undersaddle Pickup and Contact Pickup are mixed to produce monaural output. You can adjust the volume of each pickup using the onboard control knobs installed on the side.

### ■ Stereo Output (Fig.2)

When plugged into both output jacks ③ and ④, the signals of the Undersaddle Pickup ③ and the Contact Pickup ④ output separately. You can adjust the volume of each pickup using the onboard control knobs installed on the side.

※ If the plug is only connected to the 1/4" jack ④, no sound will be output.

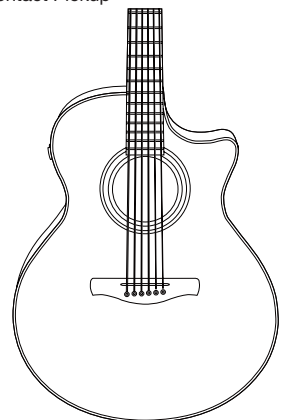

Undersaddle Pickup  
Contact Pickup **Fig.2**



### ■ Replacing the batteries

1. Press the tab on the battery case and remove the old battery.
2. Insert the new 9V battery (006P type) into the battery case from the electrode side. Since there is no + (positive) and - (negative) polarity in the battery box, either  $\pm$  orientation of the battery is acceptable.
3. Close the battery case until the lid makes a click sound.

### ■ Battery Tester

When you plug in a guitar, the battery tester will activate; the LED will flash one time in red if there is adequate battery power, and will light in red if the battery power is too low.



#### NOTE

---

The battery used with the Pre-Amp needs to be replaced regularly. The battery needs to be replaced in situations such as the following:

- Deterioration in sound quality or reduction in volume
- A low battery warning is displayed

Also, be sure to remove the plug from the output jack when not using a guitar in order to prevent unnecessary damage to the battery.

---

- ※ The included battery is for confirming proper operation of the Pre-Amp at the factory, and may have a short lifespan.
- ※ Discard of used batteries in accordance with local laws and regulations.
- ※ The specifications and appearance of this product are subject to change without notification for the purpose of improvement.

