


# SRMS

A: Intonation adjustment screw

B: Saddle height adjustment screw (1.5mm hex key wrench)

C: Slid-able saddle lock screw (1.5mm hex key wrench)

## MR55

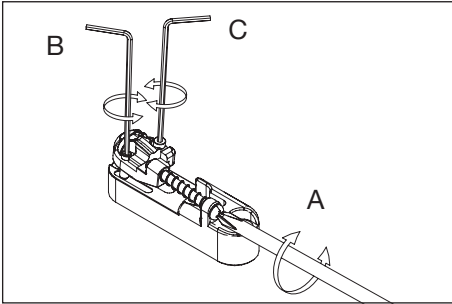

## STRING REPLACEMENT

### MR55

Hook the ball end below the string catch at the rear of the bridge.

