

TRUE TOUCH TRAINING KIT

INSTRUCTION MANUAL





■ Please read through this manual before beginning use.

Thank you for purchasing the TAMA Training Kit. To ensure safe and efficient use, please read this manual completely before beginning assembly.

■ Packing list

Model No.	Description	TTK2S	TTK4S	TTK5S
		2pc Kit	4pc Kit	5pc Kit
TTBD6	Bass drum pad	○	○	○
TTSD10	Snare drum pad	○	○	○
TTHT8	High tom pad(8") w/Mounting clamp		○	○
TTLT9	Low tom pad(9") w/Mounting clamp			○
TTFT9	Floor tom pad(9") w/Mounting clamp, ratchet arm,&L-rod		○	○
TTKTS	Tom pad stand		○	○

Note: This Training kit does not include a snare stand that's required to set up the snare drum pad. Please use your existing snare stand or purchase one separately.

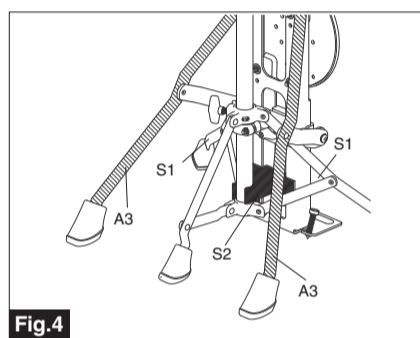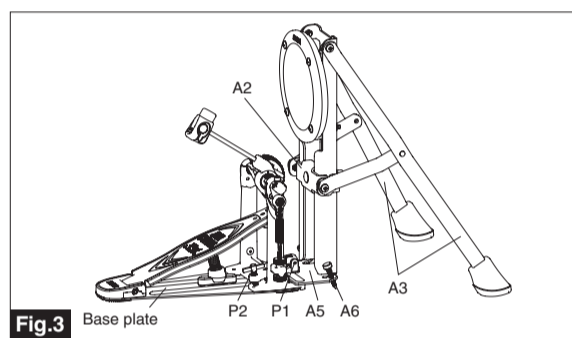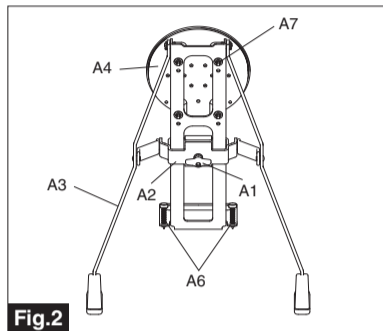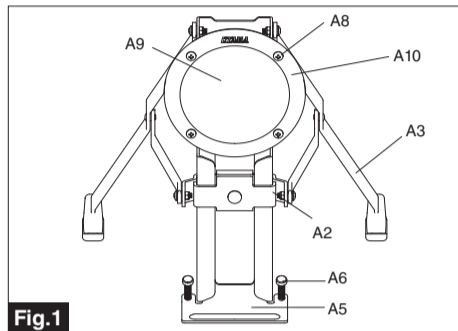

■ Bass drum pad (TTBD6)

Setting up the Bass Drum Pad

- Loosen the T-nut (A1). Then, pull up the slider (A2) to open the two legs of the bass drum pad.
- While the T-nut (A1) is loose, stand the bass drum pad upright.
- Place a bass drum pedal onto the clamp plate (A5). Tighten the T-bolt (P2) to the hoop clamp (P1) to secure it in place (See Fig.3).
- Stabilize the bass drum pad by loosening the T-nut (A1) and adjusting the two legs so the base plate and heel of the pedal sit firmly on the floor. Then, tighten the T-nut (A1).
- To prevent the bass drum pad from moving during use, adjust the spikes (A6) as needed. Turn the spike clockwise or counterclockwise to set to your desired position.



CAUTION!

The spikes can scratch or damage certain flooring. When the spikes are in use, placing a rug or mat on the floor is recommended.

- Configure the bass drum pad (TTBD6) as shown in Fig.4. Set the two legs (A3) of the bass drum pad forward so that they straddle the two longer legs (S1) of the tom pad stand (TTKTS).
- Insert the Spacer (S2) into the hole on the back of the bass drum pad to connect them together.


Adjusting the Bass Drum Pad height (Fig.2)

- The beater of some bass drum pedals (ex. TAMA HP50) may not hit the center of the bass drum pad. To compensate, the height of the bass drum pad can be lowered by 20mm (approx. 3/4"). First, remove the four square head bolts (A7) on back of the pad. Then, move the pad (A4) to the four lower holes and fasten the square head bolts (A7) to secure it in place.

■ Replacing the Kick Pad Cover (Model No. TTBC6)

The Kick Pad Cover can be replaced when it becomes worn. (sold separately).

- Loosen the T-nut (A1), and collapse the two legs of the bass drum pad. Place the bass drum pad on the floor facing upwards, and loosen the 4 screws to remove the hoop (A10) and kick pad cover (A9) (see Fig.1&2).
- Place the new kick pad cover over the bass drum pad's rubber surface, then reattach the hoop (A10) and fasten the screws to secure it in place.

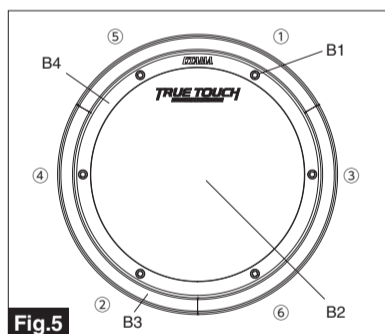

■ Snare drum pad (TTSD10)

Snare Drum Pad Tension Adjustment

- The tension of the snare drum pad can be adjusted to change the feel. Tighten or loosen the square head bolts (B1) to your desired tension. Gradually adjust the bolts in the diagonal order as shown in Fig.5.



Snare Drum Pad Rubber Rim

The snare drum pad is equipped with a rubber rim (B3), allowing you to play rim shots just like on an acoustic drum.

■ Replacing the Mesh Head on the Snare Drum Pad (Model No. TTMH10)


The snare drum pad's mesh head can be replaced when it becomes worn (sold separately).

- Loosen the six square head bolts (B1) to remove the hoop (B4) and mesh head (B2) (see Fig.5). Place the new mesh head over the snare drum pad's foam surface. Then, reattach the hoop (B4) tighten the square head bolts. Please note: the square head bolts should be tightened in the diagonal order as shown in Fig.5.

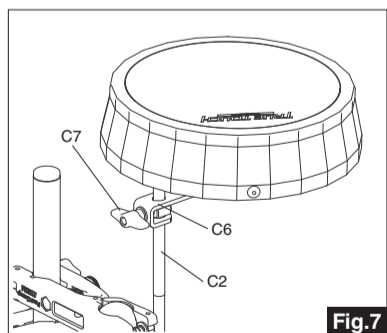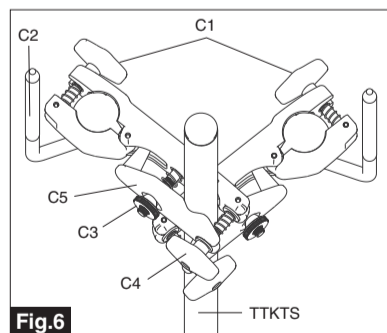

■ Setting up the Tom Pads (TTHT8, TTLT9)

- The tom pads are designed to be placed on a dedicated stand (TTKTS) using the included clamps for each pad.
- When attaching the clamps to the stand, evenly tighten the T-nut (C4) and round nut (C3) so that the clamp and cover (C5) are parallel as shown in Fig.6.
- The ball rod position can be changed according to where the tom pad will be installed on the stand. To remove the ball rod, open the clamp by loosening the T-nut (C1). Whether used on the left or right side, set the ball rod (C2) on the opposite side of the T-nut (C1) as shown in Fig.6.
- Set the pad holder (C6) onto the ball rod (C2) and tighten the T-nut (C7) to secure it in place (Fig.7). Make sure the pointed tip of the ball rod (C2) does not hit the underside of the pad.
- Loosen the T-nut (C1) on the clamp to adjust the position of the tom pad. Tighten the T-nut once the desired position is achieved.

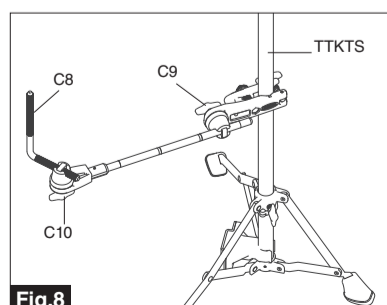

■ Setting up the Floor Tom Pad (TTFT9)

- Attach the included clamp to the stand (TTKTS). Evenly tighten the T-nut and round nut of the clamp so that the clamp and cover are parallel.
- Attach the ratchet arm and L-rod (C8) as shown in Fig.8. Attach the L-rod to the pad holder in the same manner as the tom pads.
- Loosen the T-nut (C9, C10) to adjust the position of the floor tom pad. Tighten the T-nut once the desired position is achieved.